

1A-25B & 2A-700B Fuel Oil Filters



1A-25B and 2A-700B

Compatible with Bio-Fuel Blends up thru B100!

- Standard with **BioGasket**
- Durable Epoxy Coated Galvanized Steel Filter Bowl Inside & Out
- **4EVERLoc** Bottom Bolt Design

1A-30 and 2A-710

Wool Felt Filter Element Cartridge
Standard with 1A-25B & 2A-700B



1A-30BG and 2A-710BG with **BioGasket**

Compatible with Fuel Oil Conforming to ASTM D1418 (up to B100)!

- **2000** 1A-30 Wool Felt Replacement Cartridge
10 GPH Firing Rate at 10 Microns
- **2006** 2A-710 Wool Felt Replacement Cartridge
25 GPH Firing Rate at 10 Microns



1A-30 and 2A-710


Compatible with Bio-Fuel Conforming to ASTM D396-09 (up to B5)

- **2003** 1A-30BG Wool Felt Replacement Cartridge
25 GPH Firing Rate at 10 Microns
- **2017** 2A-710BG Wool Felt Replacement Cartridge
25 GPH Firing Rate at 10 Microns


1A-25B & 2A-700B Fuel Oil Filters



Clean Pressure Drop No. 2 Fuel Oil 1A-25B

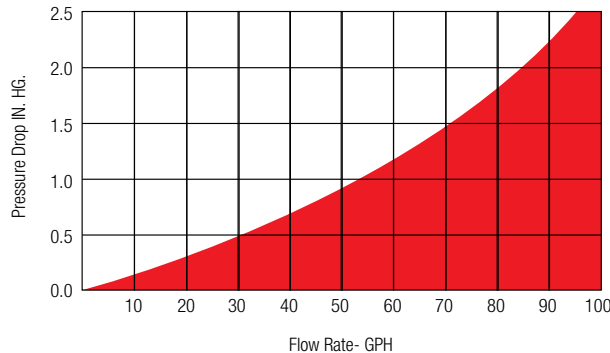

Clean Pressure Drop No. 2 Fuel Oil 2A-700B

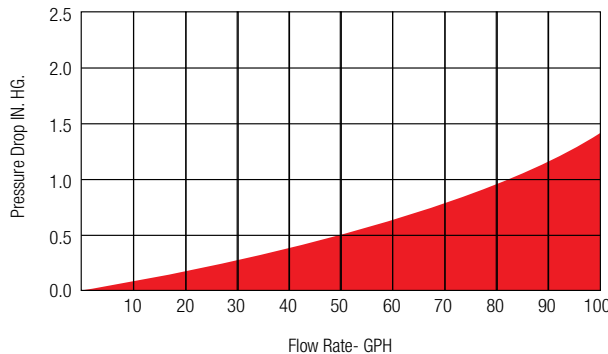

1300

1A-25B 3/8" General Fuel Oil Filter
10 GPH Firing Rate at 10 Microns 40 PSI



1308

2A-700B 3/8" General Fuel Oil Filter
25 GPH Firing Rate at 10 Microns 40 PSI

SPECIFICATIONS

	1A-25B	2A-700B
Height	5-1/8 in.	6-1/4 in.
Diameter	3-5/8 in.	4-3/8 in.
Weight	2 lbs.	3 lbs.
Pipe Size	3/8" N.P.T. STD.	3/8" N.P.T. STD.
Special - Upon Request	(1/4" Available)	(1/2", 3/4" Available)
Working Pressure	40 P.S.I.	40 P.S.I.
Firing Rate-#2 Fuel Oil	10 GPH	25GPH
Replacement Elements	Pt. No. 1A-30	Pt. No. 2A-710
Filter Media	Wool Felt (10 Micron)	Wool Felt (10 Micron)
Felt Surface	41 Square Inches	83 Square Inches
Felt Volume	11.5 Cubic Inches	21.3 Cubic Inches