

IMPORTANT: OPW products should be used in compliance with applicable federal, state, provincial, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. OPW MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. OPW reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.



OPW 241TPS Hose Swivels (241TPS)



The OPW 241TPS Provides Two-Plane Swiveling Rotation For Easy Nozzle Positioning and Reduced Hose Wear

The OPW 241TPS swivel is designed for applications where easy nozzle and hose handling is important for customer convenience. The OPW 241TPS is installed between the nozzle and hose to reduce customer strain, provide flexibility and reduce premature hose wear.

Table of Contents:

1. Features & Benefits
2. Flow Charts
3. Ordering Specifications
4. Notes & Warnings

Features & Benefits

- **Customer convenience** - provides customers with the flexibility to fuel their vehicles from virtually any direction.
- **Two-plan rotation** - the first plane (at nozzle inlet) allows 360 degree swivel action for easy rotation of the nozzle away from dispenser.
The second plane (at hose connection) provides 270 degree swivel action, for easy nozzle positioning in fillpipes.
In addition to the customer convenience benefits, the unique two-plane rotation helps reduce hose kinking and premature hose wear.
- **Compact, attractive profile** - provides a sleek, modern appearance, allowing hoses to hang straight down instead of at an angle.
- **Secure design** - not repairable or rebuildable for certainty of operation. Every OPW 241TPS is factory assembled and tested.
Dual seals - added protection vs. thermal and chemical degradation.
- **Design working pressure** - OPW products are designed to work at 50 PSI (3.45 bar) maximum pressure.
- **Special swivel outlet design** - the male adaptor is specially designed such that tightening of the threaded joint will not inhibit swivel rotation.
- **Listed by Underwriters Laboratories, Inc.** - for gasoline, E85, E100, and M85 gasoline blends. See our web site at: www.opw-fc.com for specific listings.
- **241TPS-0492 UL Listed for E85 & E100 fuel blends.**

Materials

Body: aluminum

Inlet Adaptor: zinc

Outlet Adaptor: zinc

Seals: Buna-N, Viton®

Bearing: nylon

Weight: 3/4": .65 lbs., .30 kgs.

1": 1.55 lbs., .703 kgs.


UL Listed




ULC Listed



GPM

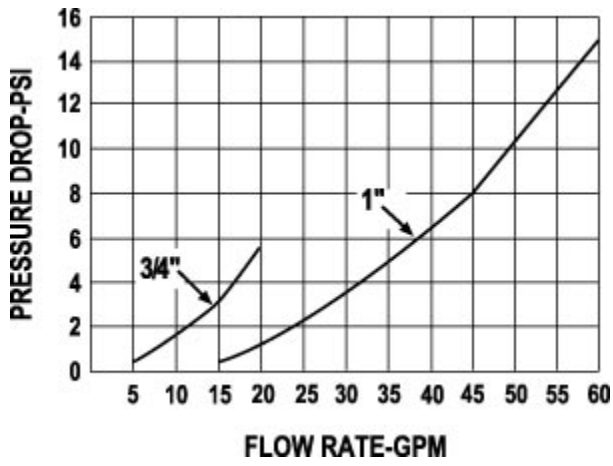

LPM

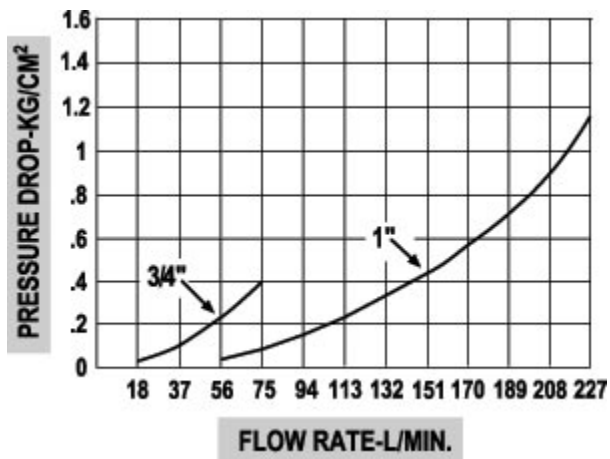


Ordering Specifications

Product #	Inlet/Outlet	Length	Depth
		A	B
241TPS-0241	3/4" F x 3/4" M (NPT)	4 7/8"	2 3/16"
	19 mm. x 19 mm.	124 mm.	56 mm.
241TPS-1000	1" F x 1" M (NPT)	6 1/32"	2 17/32"
	25 mm. x 25 mm.	153 mm.	64 mm.
241TPS-0492	3/4" F x 3/4" M (NPT)	4 7/8"	2 3/16"
	19 mm. x 19 mm.	124 mm.	56 mm.

For ordering specifications not listed in this catalog, contact Customer Service at 1-800-422-2525.

Dimensions

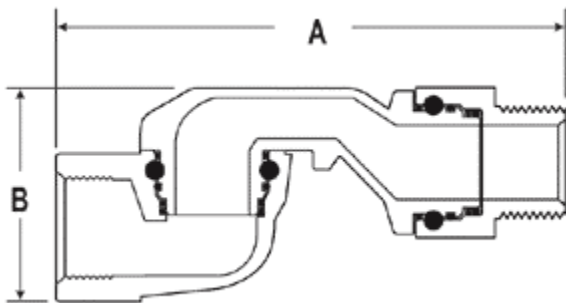

NOTE:

See OPW's Website at: www.opw-fc.com for product instruction sheets, trouble-shooting guides, how-to-use guide and to view the Do's and Don'ts at the Gas Pump video.

