

Service Station Hardware



Extractor Vent Valves


EBW's Extractor Vent Valves are designed to fit into a 4" tank opening on an underground storage tank. Models with a brass cage assembly are used in conjunction with EBW's 2" Float Vent Valves offering easy removal for maintenance or testing. Several outlet sizes are available to accommodate manifolded tank lines and Stage II vapor recovery installations.

Design Highlights & Advantages


- Zinc-coated cast iron body offers long life and protection against rust and corrosion.
- Brass insert cage allows easy access to float vent valves.

Certifications/Listings


- * CARB: EVR Phase 1 Certification VR-101 and VR-103
- * XXX-300 Series Missouri #99-08
- **Biofuel Approved (E85 and biodiesel)

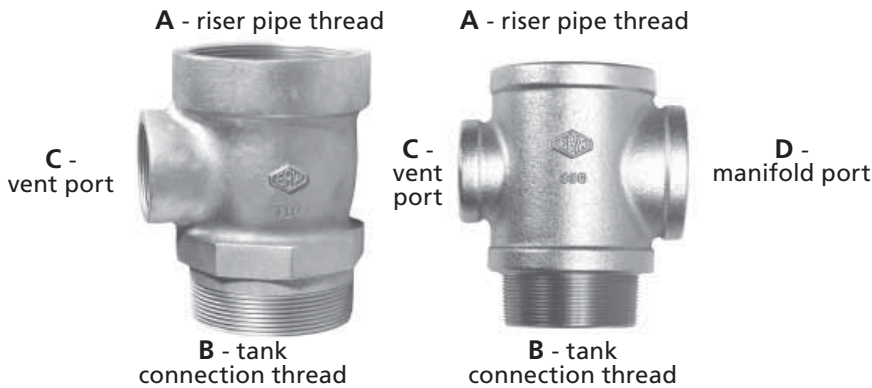

PART	SIZE-A		SIZE-B		SIZE-C		SIZE-D		DESCRIPTION	WEIGHT	
	IN.	MM.	IN.	MM.	IN.	MM.	IN.	MM.		LBS.	KG.
310-300-01	4	102	4	102	2	51			with cage	15	6.8
310-400-01*	4	102	4	102	2	51			without cage	13	5.9
311-300-01	4	102	4	102	3	76			with cage	15	6.8
311-400-01*	4	102	4	102	3	76			without cage	13	5.9
330-300-01	4	102	4	102	3	76	2	51	with cage	18	8.16
330-400-01*	4	102	4	102	3	76	2	51	without cage	15	6.8
331-300-01	4	102	4	102	3	76	3	76	with cage	18	8.16
331-400-01*	4	102	4	102	3	76	3	76	without cage	15	6.8
340-300-01	4	102	4	102	2	51	2	51	with cage	20	9.07
340-400-01*	4	102	4	102	2	51	2	51	without cage	17	7.71
330-400-11**	4	102	4	102	3	76	2	51	without cage	18	8.16

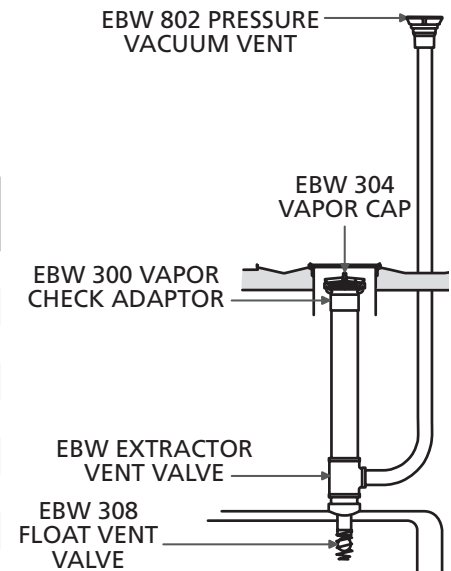

Accessories

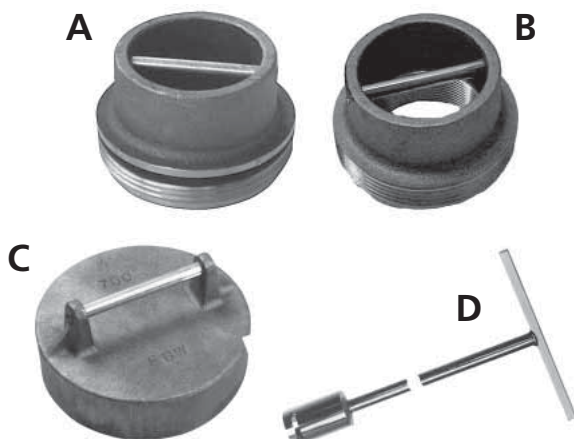

A - HARD COATED ALUMINUM PLUG WITH O-RING SEAL, for isolating vent piping from tank during testing.

B - BRASS CAGE ASSEMBLY, for use with EBW Float Vent Valves.

C - BRASS PIPE CAP 4"

D - EXTRACTOR WRENCH, works on all EBW Extractor Vent Valves for removing Extractor Cage Assemblies and inserting test plugs. Length: 5'.

PART	SIZE IN.	DESCRIPTION	LBS.	KG.
A - 391-201-01	4	Test Plug	3.6	1.63
B - 310-200-01		Insert Cage		
C - 760-201-01	4	Pipe Cap	4.6	2.09
D - 321-100-01	4	Extractor Wrench	14	6.35