


# FILL-RITE®

The Most Trusted Name in Pumps and Meters

## 900CD S & E Data Sheet

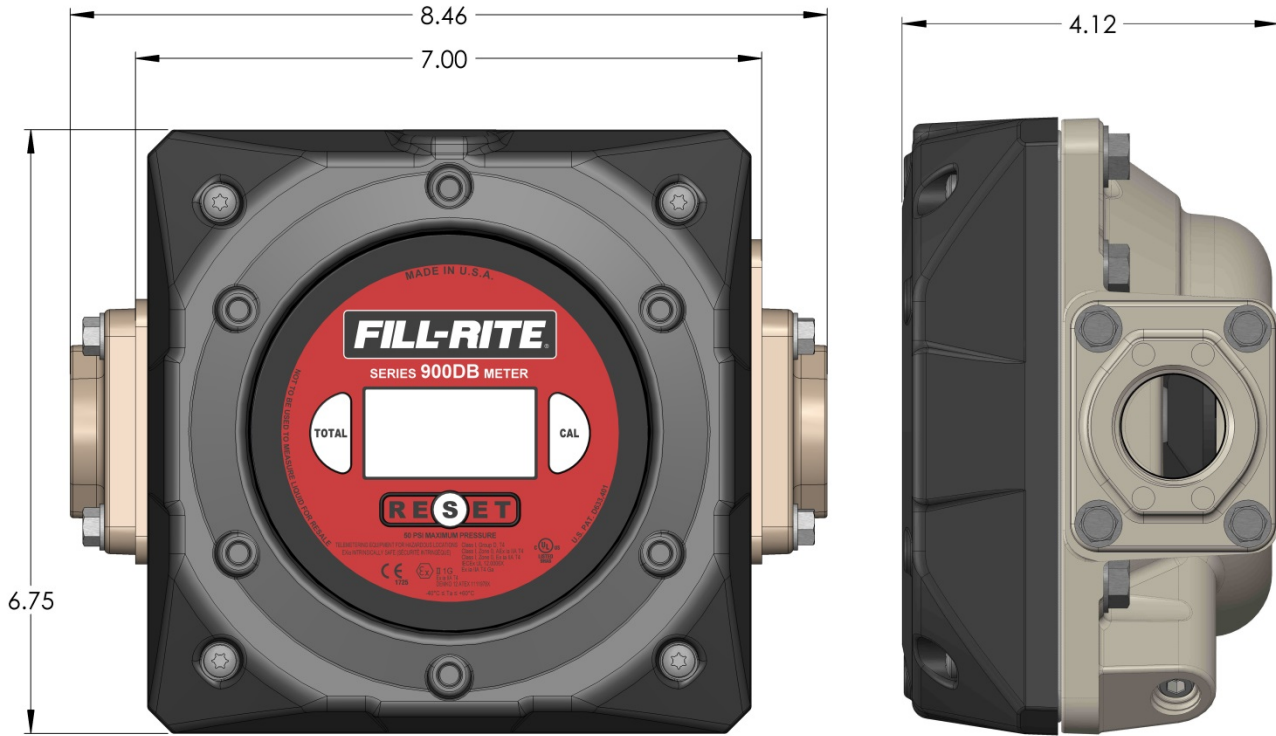

### Technical Information / Specifications

**Accuracy:**  $\pm 1.25\%$     **Flow Rate:** 6 to 40 GPM (23 to 151 LPM)    **Repeatability:**  $\pm 0.25\%$

**Pressure Rating:** 50 psi

**Calibrations Settings:** Ounces, Pints, Quarts, Liters, Gallons, and one Special Unit of Measure option.

**Resettable Counter:** 4 digit resettable counter.

**Master Totalizer:** 7 Digit non-resettable totalizer, 7 digit resettable totalizer

**Construction:** Housing: Aluminum    **Measurement System:** Nutating Disc    **Seals:** Fluoroelastomer

**Certifications:** UL 25, UL 913 (UL and cUL), ATEX, CE, IECx, IEC (IEC 60079-0, 60079-11, 60079-26)

### Fluid Compatibility

The 900DB series meter **IS compatible** with the following fluids:

Gasoline    Biodiesel    E15    Diesel Fuel    Kerosene    Mineral Spirits    Heptane    Hexane

The 900DB series meter **IS NOT compatible** with the following fluids:

Bleach    Hydrochloric Acid    Ink    Sulfuric Acid    Salt Water

## Features and Benefits

Large, highly visible, easy to read display.


Powered by 2 "AA" batteries (expected 4 – 6 years of service life in normal use).

"Membrane" keypad keeps moisture out and provides excellent continuous seal to the elements, even in the harshest environments.

Operating Temperature Range: -40 °- 140 ° F (-40 ° – 60 ° C).

Rotatable housing allows horizontal or vertical mounting (remove 4 Torx screws and rotate display).

NPT threads standard; BSPT threads available: NPT 1" & 1.5", BSPT 1" & 1.5".

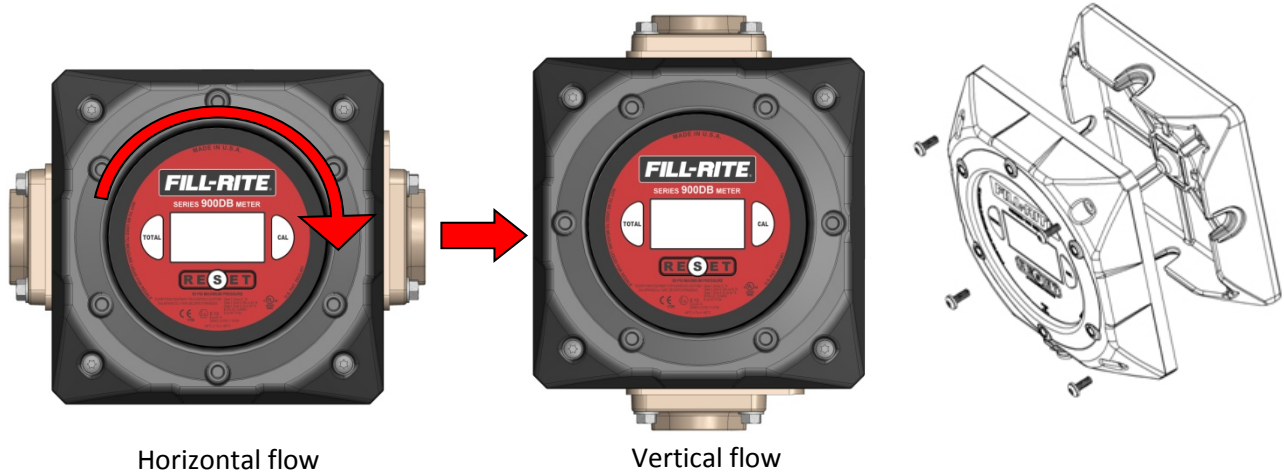


Horizontal flow

Vertical flow

## 900CD / 900CDP Performance Chart

Typical Performance Characteristics on Diesel Fuel

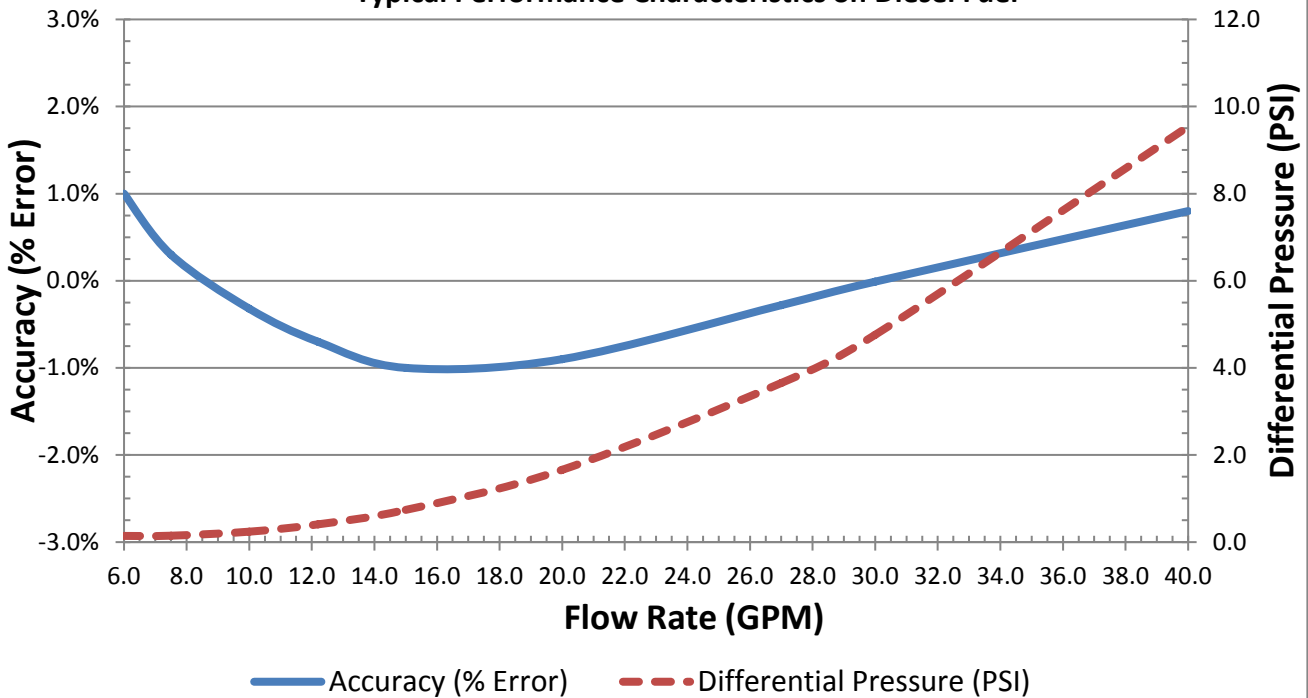

*Changes in temperatures, fluid viscosity, and system accessories may shift the performance curves*